

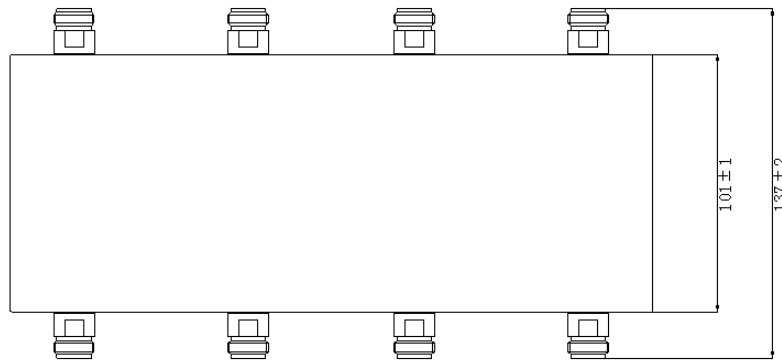
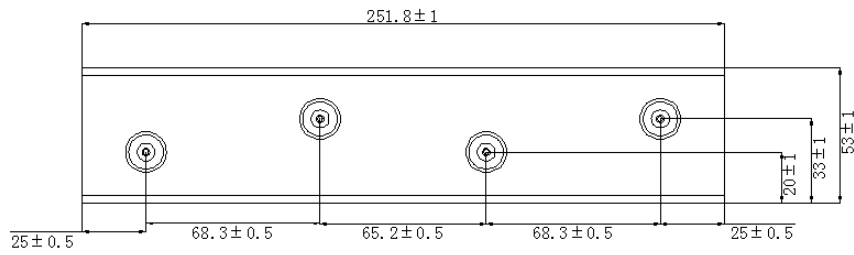


## 4X4 Matrix Specification



Item	Requirement	Remark
PN	H6-327-NF H6-327-DF H6-327-MF	
Operating Frequency	380– 2700 MHz	
Coupling	6.1 ±2.5 dB 380-698 MHz	
	6.1 ±1.2 dB 698-2700MHz	
Insertion loss at frequency band	0.3dB	
Isolation	25 dB	
VSWR	1.25:1	
3rd Order IMD 2X43dBm	- 160dBc	
Average Power, maximum	150 W	
Impedance	50 ohm	
Environment	IP65	
Work temp	-25-60C	
Connector	N(f) , DIN(f), 4310(f)	

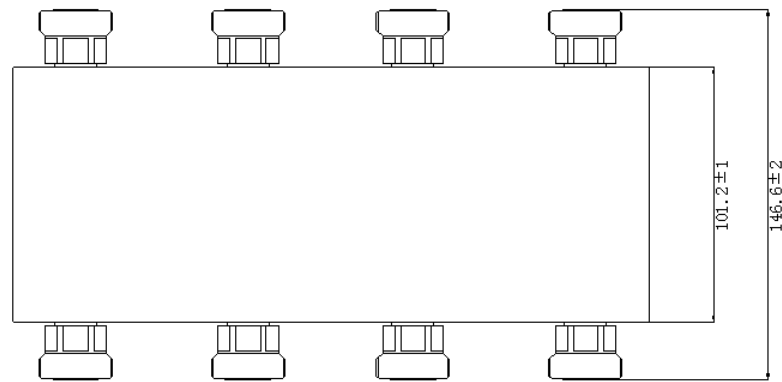

**N Type**

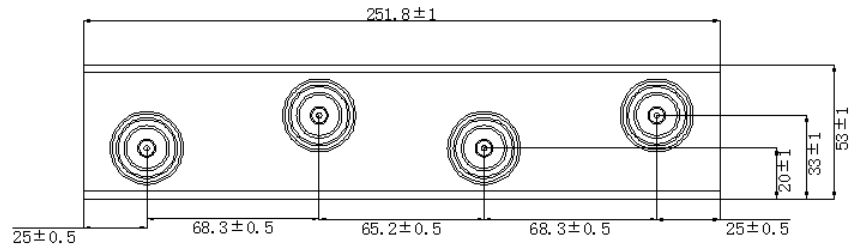

### DIN Type

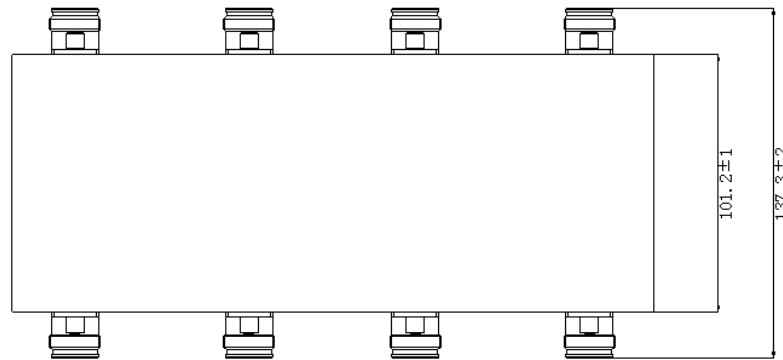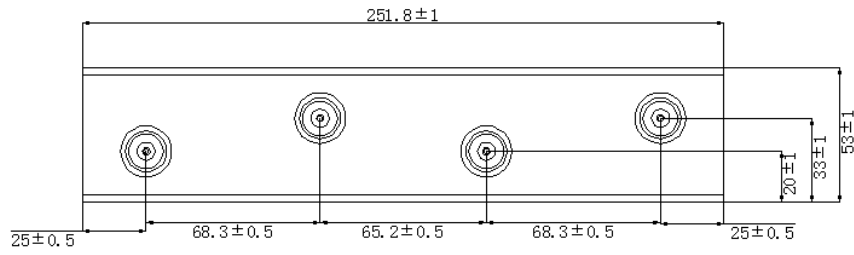

### 4310 Type